


**RoHS Compliant ALUMINIUM ELECTROLYTIC CAPACITOR**

**HR Series**

**■ FEATURES**

- ◆ Load life of 5000 hours at 105°C
- ◆ Applications for switching power supplies
- ◆ Low impedance and low ESR with high ripple current

**■ OUTLINE**

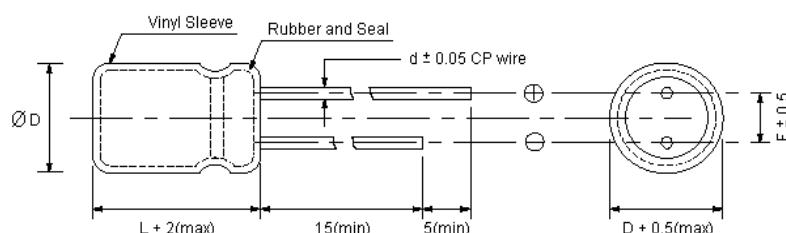

	D	8	10	13	16	18
F	3.5		5.0		7.5	
d		0.6			0.8	

**■ SPECIFICATIONS**

Items	Characteristics														
Capacitance Tolerance (120Hz, 25°C)	$\pm 20\%$ (M)														
Rated Working Voltage Range	10 ~ 100Vdc														
Operation Temperature	-40°C ~ +105°C														
Leakage Current (25°C)	(After 3 minutes applying the DC working voltage) $I \leq 0.01CV$														
Surge Voltage (25°C)	W.V.	10	16	25	35	50	63	100							
	S.V.	13	20	32	44	63	79	125							
Dissipation Factor (120Hz, 25°C)	W.V.	10	16	25	35	50	63	100							
	$\tan \delta$	0.12	0.10	0.09	0.08	0.07	0.06	0.06							
	◆ For capacitance exceeding 1000 $\mu$ F, add 0.02 per increment of 1000 $\mu$ F														
Temperature Characteristics	W.V.	10 ~ 16				25 ~ 100									
	- 25°C / + 25°C	3				2									
	- 40°C / + 25°C	6				4									
	◆ Impedance ratio at 120Hz														
Load Test	After 2000 hours application of WV at +105°C, the capacitor shall meet the following limits: (3000 hours for 10φ and 13φ, 5000 hours for 16φ and larger)														
	Capacitance Change	$\leq \pm 25\%$ of initial value													
	$\tan \delta$	$\leq 150\%$ of initial specified value													
	Leakage Current	$\leq$ initial specified value													
Shelf Test	After 1000 hours, no voltage applied at +105°C, the capacitor shall meet the following limits:														
	Capacitance Change	$\leq \pm 25\%$ of initial value													
	$\tan \delta$	$\leq 150\%$ of initial specified value													
	Leakage Current	$\leq 200\%$ of initial specified value													



**RoHS Compliant ALUMINIUM ELECTROLYTIC CAPACITOR**

**HR Series**

**■ DIMENSIONS**

WV uF \	10	16	25	35	50	63	100
47				]	8 x 12	8 x 14	10 x 20
68			]	8 x 12	8 x 14	10 x 16	13 x 20
100	[	8 x 12	8 x 12	8 x 14	10 x 16	10 x 16	13 x 25
220	8 x 12	8 x 14	10 x 16	10 x 16	10 x 20	13 x 20	16 x 31
330	8 x 14	8 x 16	10 x 16	10 x 20	13 x 20	13 x 25	16 x 35
470	8 x 16	10 x 16	10 x 20	13 x 20	13 x 25	13 x 30	16 x 41
680	10 x 16	10 x 20	13 x 20	13 x 25	13 x 30	16 x 35	
1000	10 x 20	13 x 20	13 x 25	13 x 30	13 x 40	18 x 35	
1500	13 x 20	13 x 25	13 x 30	13 x 40	16 x 41		
2200	13 x 25	13 x 30	13 x 40				
3300	13 x 30	13 x 40	16 x 41	18 x 41			
4700	13 x 40	16 x 35	18 x 41				




RC: mA (rms) at 100KHz 105°C

Imp: mΩ (ohm) at 100KHz 25°C

**■ PERMISSIBLE RIPPLE CURRENT**

WV uF \ Item	10		16		25		35		50		63		100	
	RC	Imp												
47								]	278	0.600	350	0.480	500	0.410
68						]	314	0.370	375	0.350	470	0.330	610	0.280
100		]	250	0.650	310	0.400	420	0.310	560	0.270	600	0.260	790	0.230
220	370	0.440	420	0.290	600	0.200	660	0.180	970	0.150	1040	0.140	1200	0.130
330	480	0.310	580	0.210	780	0.170	1020	0.130	1150	0.120	1330	0.110	1710	0.098
470	610	0.220	730	0.160	1010	0.120	1180	0.097	1465	0.092	1700	0.088	2080	0.082
680	780	0.150	970	0.110	1320	0.075	1500	0.072	1850	0.068	2050	0.065		
1000	1040	0.100	1310	0.080	1670	0.068	1970	0.062	2080	0.055	2330	0.049		
1500	1430	0.090	1600	0.065	1900	0.058	2300	0.042	2370	0.032				
2200	1700	0.069	1980	0.059	2510	0.050	2710	0.040						
3300	2090	0.055	2450	0.048	2800	0.040	3050	0.035						
4700	2450	0.048	2680	0.042	3010	0.036								

**■ LOAD LIFE**

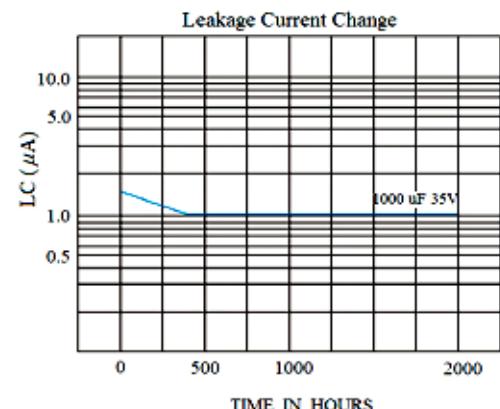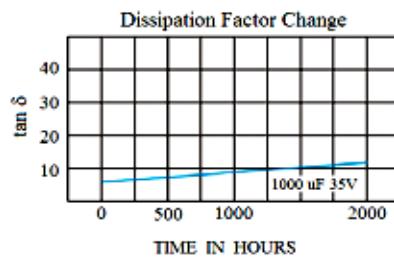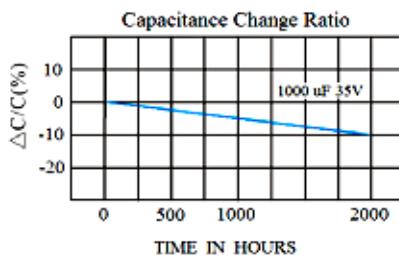

**■ RIPPLE CURRENT COEFFICIENTS**

Temperature(°C)	45	65	85	105
Multiplier	2.40	2.15	1.70	1.00

Hz uF	60(50)	120	1K	10K	100K
47 ~ 330	0.60	0.70	0.85	0.95	1.00
39 ~ 1000	0.65	0.75	0.90	0.98	1.00
1000 ~ 4700	0.75	0.80	0.95	1.00	1.00